


# CENTER 307/308 MINI THERMOMETER



- Dual Input
- Dual Display
- Auto Range
- Auto Power off
- REL Function
- HOLD Function
- MAX / MIN Function
- Resolution 0.1 °C / 0.1 °F

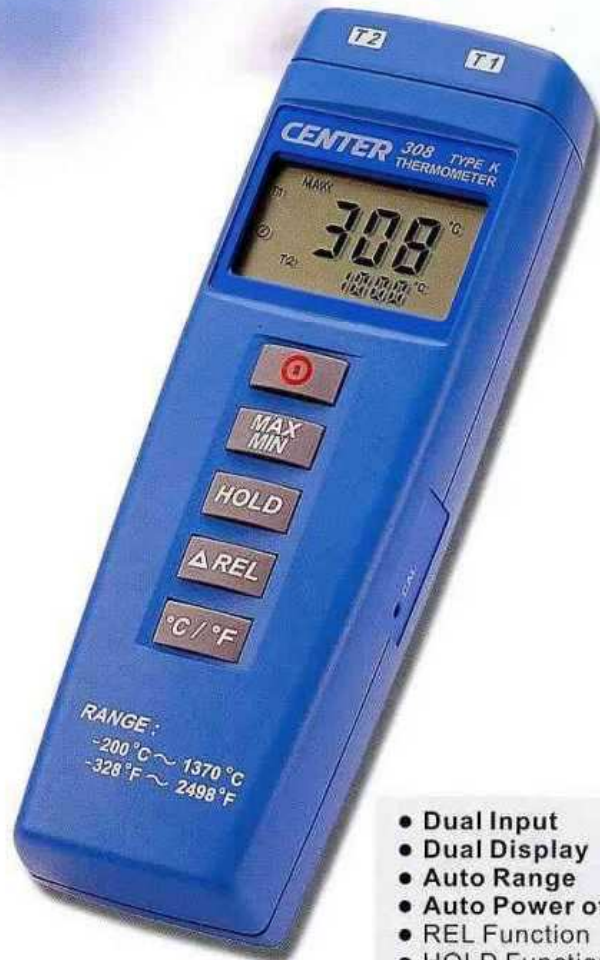

# CENTER®

# CENTER 307/308 MINI THERMOMETER



ACTUAL SIZE 1:1

**CENTER**<sup>®</sup>  
**CENTER TECHNOLOGY CORP.**

## FEATURE

- Mini Size
- Auto Range
- Wide Measuring Range
- Dual Input (CENTER 308)
- Dual Display (CENTER 308)
- Auto Power Off
- REL Function
- HOLD Function
- MAX/MIN Function
- Resolution 0.1 °C/0.1 °F

Real Time Display With MAX MIN Recording



Dual Display

## SPECIFICATIONS

Measurement Range: -200 °C ~ 1370 °C ; -328 °F ~ 2498 °F

Accuracy: -200 °C ~ 1370 °C..... ± 0.3%rdg+1 °C

-328 °F ~ 2498 °F..... ± 0.3%rdg+2 °F

Input Protection: 60V DC or 24Vrms AC Maximum

Battery Type: 9V, NEDA 1604, IEC 6F22, JIS 006P

Battery Life: 120 hours (with alkaline battery)

Operating Condition: 0 °C to 40 °C (<80%RH)

Storage Condition: -10 °C to 60 °C (<70%RH)

Dimensions: 164 × 54 × 34mm (6.5" × 2.1" × 1.3")


Weight: Approx.200g

Accessories: Battery, Operation Manual

Temperature Probe TP-K01

(CENTER 307 1Pcs) (CENTER 308 2Pcs)

## OPTIONAL ACCESSORIES

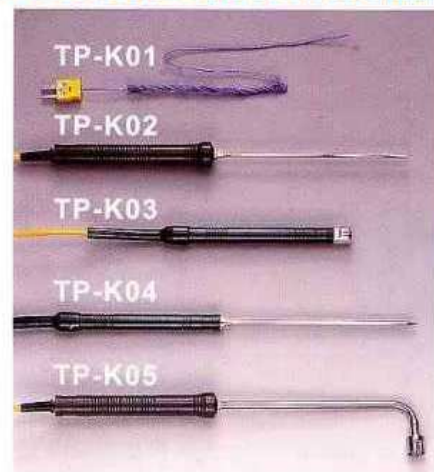

\* The specifications and other information in this catalogue are subject to change